



Image for illustration purpose. Actual product might differ slightly.



0-870-23 R Watch Panel Alarm Display

Durite's R Watch panel alarm display to send notification to driver, with 3 meters adaptor cable, with RS232 to RS485 cable (connect with dashcam 0-870-21). E Mark R10.

- IP54 water-resistant and dustproof
- Diagonal size 1.4"
- Resolution 128x128; Brightness 400cd/m²
- Built-in, adjustable buzzer volume (not less than 80dB)
- 5V-12V DC
- RS485
- 45(H) x 42(W) x 26(L)mm



THE TRUSTED QUALITY BRAND FOR PROFESSIONALS

WARNINGS

Before using this unit please read these instructions carefully. Take special care to follow the warnings and safety suggestions listed below. Keep these instructions for future reference. There are no user-serviceable parts within the unit, refer servicing to qualified service personnel.


PRECAUTIONS

- Please ensure you are familiar and comply with local traffic and driving regulations.
- Connection - The product should only be connected to a Durite cctv system.
- Heat - Do not install the product near heat sources.
- Mounting - Ensure the product is facing the desired direction before fixing.
- Service - The user should not attempt to service these units beyond that described in these instructions. All other servicing should be referred to an authorised service technician.







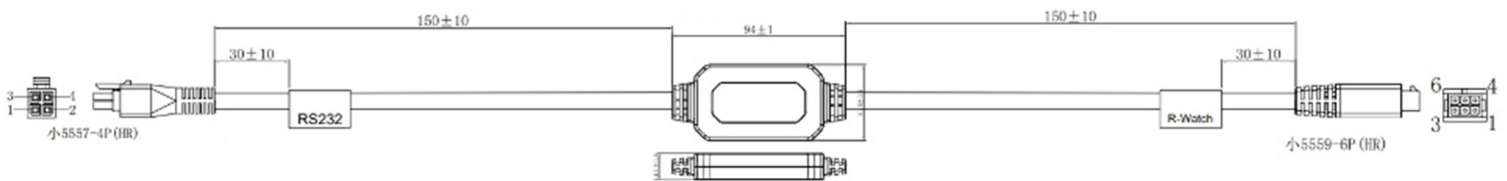


GENERAL








It is recommended that all connections are additionally sealed by either wrapping with a suitable tape or application of heat shrink sleeving. It is recommend to connect the system and test before fixing to ensure the correct field of view is displayed.

*Connection Type:



ALARM TYPES

	<p>System Activation Indicator</p> <p>The system has been activated.</p>
	<p>System Offline Indicator</p> <p>The system is offline.</p>
	<p>Front Collision Warning</p> <p>Indicates possible collision with the vehicle in front.</p>
	<p>Headway Distance Meter</p> <p>A two-digit number that reflects the headway, in seconds, from the vehicle ahead. Only values of 2.5 seconds or less are displayed. Green indicates safe headway.</p>
	<p>Red indicates unsafe headway.</p>
	<p>Pedestrian Collision Warning</p> <p>Indicates possible collision with pedestrian.</p>
	<p>Pedestrians in the Danger Zone</p> <p>A pedestrians have been detected in the "danger zone"; time to collision is not critical.</p>
	<p>Left/Right Deviation Alert</p>
	<p>The left or right deviation indicator will flash for 1 seconds when the vehicle unintentionally departs from the driving lane.</p>

	<p>Speed Limit Indicator</p> <p>The detected speed limit signs are displayed in the form of large icons.</p>
	<p>Driver Fatigue Warning</p> <p>Indicates that driver fatigue occurs during driving.</p>
	<p>Hand Phone Warning</p> <p>Indicates that driver is using hand phone.</p>
	<p>Driver Smoking Warning</p> <p>Indicates that driver is smoking.</p>
	<p>Driver Distraction Warning</p> <p>Indicates that driver is distracted.</p>
	<p>No Driver Warning</p> <p>It means that the driver left the driver's seat or deviated from his seat too far.</p>
	<p>Multi Information Display</p> <p>Vehicle distance, speed limit sign (upper left corner), pedestrian collision warning (upper middle), DSM alarm (upper right corner), etc. can be displayed on the display screen simultaneously.</p>

TECHNICAL SPECIFICATIONS

Type	R Watch Panel Display
Resolution	128 x 128 pixels
Connector	RS485
Buzzer (built in)	80Db
Brightness	400cd/m ²
Power voltage	12VDC (5-12VDC)
Waterproof rating	IP54
Power Consumption	1.5W
Operating temperature	-20°C ~ +70°C
Storage temperature	-20°C ~ +70°C
Weight	0130.Kg
Dimensions	Please see below
Certificate	E Marked R10 EMC

TECHNICAL DRAWING

*not to scale

